

DESIRO-HC / SIEMENS




DIRECT LED FIXTURE

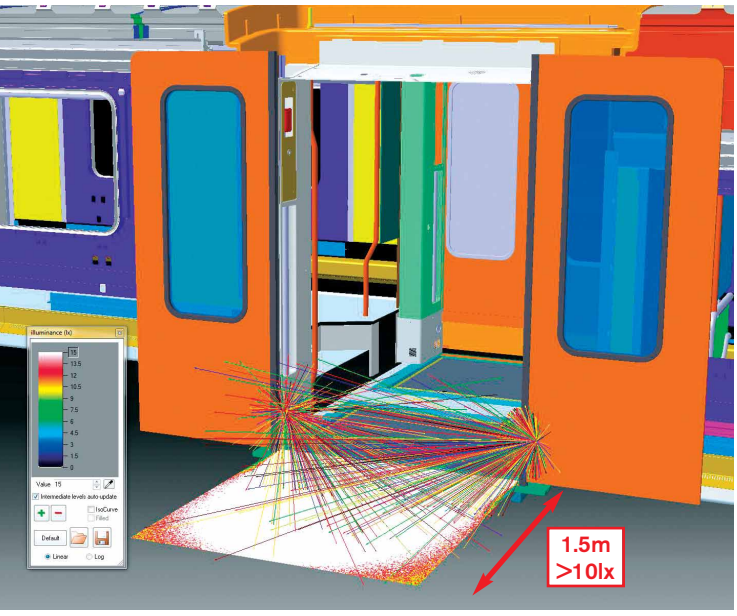

Platform illumination 1.5m in front of the door threshold

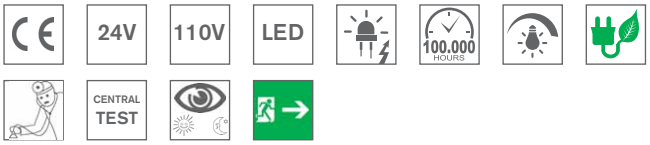

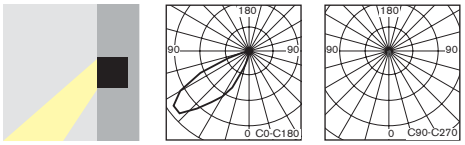

- Recessed LED DOOR AREA lighting fixture has been designed for the illummination of threshold area.
- It provides powerfull and energy-saving light. Thanks to its geometry and position of LEDs the light is directed to the required area on the threshold and platform in front of the door train in order to comply with TSI and EN13272 regulations. It is equipped with the HighPower LED CREE.
- The LED lifetime is min 100.000h which decreases both maintenance and service costs

- Jedná sa o výkonné LED svietidlo vybavené HighPower LED
- Vďaka geometrii telesa/reflektoru a použitých LED je svetelný tok distribuovaný presne na požadované miesto pre osvetlenie nástupného dverného priestoru, vrátane nástupnej hrany a platformy pred dverami.
- Sĺňa TSI a EN13272 požiadavky.
- Svietidlo poskytuje výkonné a úsporné osvetlenie.
- Životnosť LED je min.100000h, čo výrazne prispieva k šetreniu servisných nákladov v porovnaní so svietidlami s halogénovou žiarovkou.

STANDARD ACCESSORIES / ŠTANDARDNÁ VÝBAVA


- HighPower LEDs
- LED Binning < 3 MacAdam Steps
- Solid AL base
- Halogen-free wiring RADOX GKW
- WAGO terminal blocks
- External electronic ballast is needed (1 ballast feeds 1 or 2 fixtures)

- HighPower LED
- LED Binning < 3 MacAdam Steps
- základňa svietidla AL
- Halogénovo bezpečné vodiče RADOX GKW
- WAGO prípojné svorkovnice
- Vyžaduje externý eelektronický predradník (1ks pre 1-2 svietidlá)

OPTIONS / PRÍPLATKY

- External electronic ballast must be ordered separately
- Alternative colour surface treatment
- Alternative customised dimmensions
- Alternative LED light colour
- Dimming function 10%-100% (refer also to pages No.48-52)
- Central diagnostics and communication (refer also to pages No.48-52)

- Externý elektronický predradník musí byť objednaný samostante
- Alternatívna farba svetla pre LED
- Alternatívna farba povrchu
- Alternatívne rozmery modulov
- Stmievanie 10%-100% (pozri aj str.48-52)
- Centrálna diagnostika a komunikácia (pozri aj str.48-52)

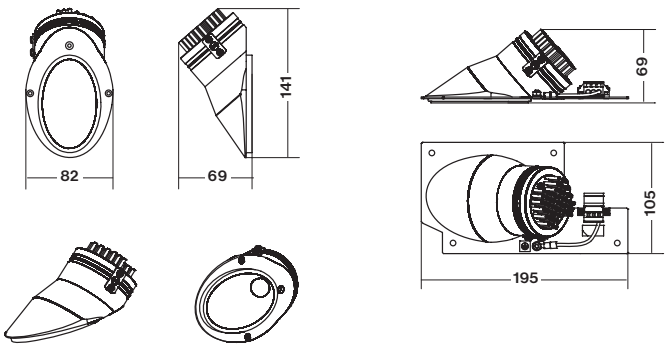

DOOR AREA / THRESHOLD LED LIGHTING FIXTURES (308-B)

Type / Typ	Dimmensions mm	Power Supply	Light Source	Dimming	AutoTest	CentralControl
LED THRESHOLD FIXTURE	see the drawing	DC 24V, 110V	HighPower LED	OPTION	OPTION	OPTION
ELECTRONIC BALLAST for 1-2 FIXTURES	220x48x29 mm	DC 24V, 110V	for 1-2 FIXTURES	OPTION	OPTION	OPTION
CUSTOMISED VERSION	CUSTOMISED	CUSTOMISED	CUSTOMISED	OPTION	OPTION	OPTION

DESIRO-HC / SIEMENS



