
LOCOLUX





- Individual robust either recessed or surface mounted lighting fixtures for illumination of a driver cabin or an engine room
- Electronics meet the latest EN50155 & EN50121-3-2 requirements

- Robustné svietidlá pre prisadenú alebo zapustenú montáž do stropu pre osvetlenie kabíny alebo motorového priestoru lokomotívy
- Elektronika spĺňa EN50155 & EN50121-3-2

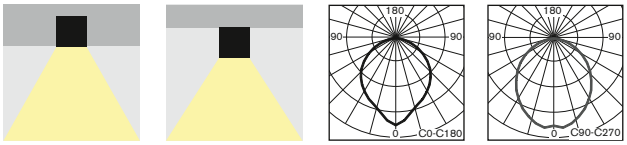

STANDARD FEATURES / ŠTANDARDNÁ VÝBAVA

- Metal sheet body finished in white polyester powder coat RAL9002
- Diffuser is made of PC (complying EN45545 and EN45545)
- Halogen-free wiring Betatrans 3GKW
- WAGO terminal block
- Dimming 50%/100% (only SETING versions)

- Teleso z lakovaného oceľového plechu v RAL9002
- PC difúzor svietidla (spĺňajúci EN45545)
- Halogénovo bezpečné vodiče Betatrans 3GKW
- WAGO prípojné svorkovnice
- Stmievanie 50%/100% (iba SETING verzie)

OPTIONS / PRÍPLATKY

- Alternative colour surface treatment
- Alternative customised dimmensions
- SMART Light & DATA BUS Control (refer to page No.41-53)
- Dimming function SETTING

- Alternatívna farba povrchu
- Alternatívne rozmery modulov
- SMART Light & DATA BUS riadenie a komunikácia (pozri str.41-53)
- Stmievanie SETTING





LOCOLUX (217-B)

Type / Typ	Dimmensions AxBxCmm	Power Supply	Light Source	Dimming
LOCOLUX LED Recessed Mounted	713x233x62 mm	DC 24V, 110V	LED 3000K or 4000K	OPTION
LOCOLUX LED Surface Mounted	655x143x62mm	DC 24V, 110V	LED 3000K or 4000K	OPTION
LOCOLUX LED Recessed + Switch	713x233x62 mm	DC 24V, 110V	LED 3000K or 4000K	OPTION
CUSTOMISED LIGHTING FIXTURE	CUSTOMISED	CUSTOMISED	CUSTOMISED	CUSTOMISED

Ask SEC for detailed drawings or the specific item order code (design@sec.sk)

LOCO Driver Cabin

