

UNILED-G LED




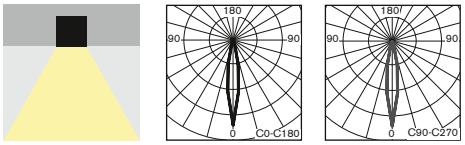


- UNILED type serie has been designed as LED SPOT lighting fixtures for direct illumination of a driver cabin or door area/threshold
- Thanks to the variable fixation of the body (sphere) the light can be directed to the required area. The angle adjustment is fixed by SEC during the production according to customer angle specification.
- The powerful illumination is ensured by HighPower LED made by one of the famous led manufacturer CREE.
- There is needed external SEC LED Driver CONTROLED 2-5xLED/24V to be able to power from 1 up to 5pcs of UNILED-G. There is available also dimmalbe version with SETTING function 50%/100%

- UNILED sú bodové svietidlá vybavené výkonnými LED pôvodne navrhnuté pre osvetlenie kabína vodiča alebo pre osvetlenie nástupného priestoru dverí.
- Vďaka guľovému tvaru telesa LED je možné nastaviť požadovaný uhol/sklon a zafixovať ho počas výroby v SEC do požadovaného smeru určeného zákazníkom.
- Pre napájanie svietidla je nutné použiť externý predradník CONTROLED 1-5xLED/24V, ktorý môže napájať 1 až 5ks svietidiel UNILED-G. Predradník môže byť navyše v stmievateľnej verzii SETTING 50%/100%

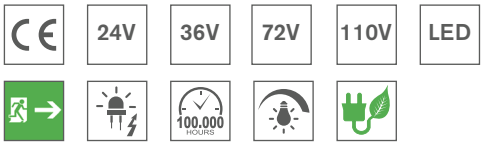

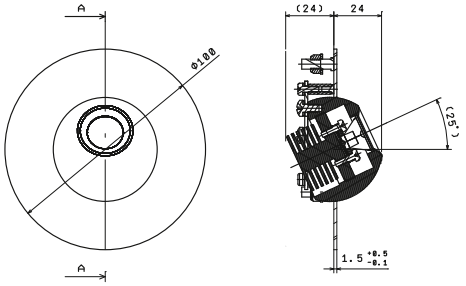

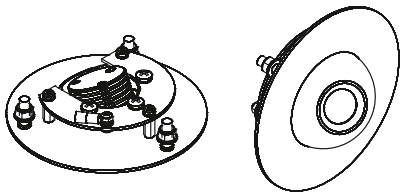

STANDARD FEATURES / ŠTANDARDNÁ VÝBAVA

- HighPower LEDs
- LED Binning ≤ 3 MacAdam Steps
- solid AL body
- Halogen-free wiring Betatrans 3GKW
- WAGO terminal blocks

- HighPower LED
- LED Binning ≤ 3 MacAdam Steps
- Svietidlo vyrobené hliníka
- Halogénovo bezpečné vodiče Betatrans 3GKW
- WAGO prípojné svorkovnice

OPTIONS / PRÍPLATKY

- Alternative colour surface treatment
- Alternative customised dimmensions
- Alternative LED light colour
- SETTING Dimming function 50%/100%

- Alternatívna farba svetla pre LED
- Alternatívna farba povrchu
- Alternatívne rozmery
- SETTING Stmievanie 50%/100%

UNILED-G (233-B)

Type / Typ	Dimmensions mm	Power Supply	Light Source	Dimming	SMART Lighting
UNILED-G 1xLED/24V DC	see the drawing	DC 24V	1xHighPower LED	OPTION	OPTION
CUSTOMISED VERSION	CUSTOMISED	CUSTOMISED	LED	OPTION	OPTION

LED DRIVERS (267-B)

Type / Typ	Dimmensions mm	Power Supply	Light Source	Dimming	Order Code
CONTOLED 2-5xLED/24V	220x48x29mm	DC 24V	for 2-5 HighPower LEDs	-	267-B-36
CONTOLED 2-5xLED/24V SETTING 50%	220x48x29mm	DC 24V	for 2-5 HighPower LEDs	50%/100%	267-B-35
CONTOLED READLUX 1-2xLED/24V	115x40x24mm	DC 24V	for 1-2 HighPower LEDs	-	115-B-04
CUSTOMISED VERSION	CUSTOMISED	CUSTOMISED	CUSTOMISED	OPTION	-

Ask SEC for detailed drawings or the specific item order code (design@sec.sk)

SEC®

SYSTEM SUPPLIER

LED SPOT Lighting Fixtures

UNILED-G LED



SEC LED SPOT Lighting Fixtures

UNILED-G




SEC
SYSTEM SUPPLIER

LED SPOTs

