


- This LED SPOT fixture is designed especially for illumination of all vehicle driver's cab or corridors or WC areas or etc.
 - Wall or ceiling panel recessed mounting, fixation by springs/bracket (please consider the panel thickness, details written in the table)
 - Thanks to the special lens is the light distributed to the required area in order to meet EN13272
 - The powerful illumination is ensured by HighPower LED
 - The LED driver is integrated in LED SPOT dome. No external electronics is needed
- Tieto SPOT LED svietidlá boli špeciálne navrhnuté pre aplikácie ako osvetlenie kabíny vodiča alebo koridorov alebo WC priestorov alebo pod.
 - Montáž do stropu/steny pomocou pružín (hrúbka panelu je dôležitá, pozri detail v tabuľke)
 - Vďaka špeciálnej šošovke je svetlo distribuované do požadovaného priestoru tak, aby bola splnená norma EN13272
 - Svietidlo je vybavené HighPower LED
 - Elektronický redradník je integrovaný v telese svietidla


STANDARD ACCESSORIES **ŠTANDARDNÁ VÝBAVA**

- Special lens for proper light distribution
 - HighPower LED
 - LED Binning ≤ 3 MacAdam Steps
 - Solid AL body painted in RALxxxx or anodised AL
 - Halogen-free wiring Betatrans 3GKW
 - WAGO terminal blocks
- Špeciálna šošovka pre distribúciu svetla do požadovaného priestoru
 - HighPower LED
 - LED Binning ≤ 3 MacAdam Steps
 - Teleso svietidla vyrobené hliníka s povrchovou úpravou RALxxxx alebo ELOX
 - Halogénovo bezpečné vodiče Betatrans 3GKW
 - WAGO prípojné svorkovnice

OPTIONS **PRÍPLATKY**

- Alternative ceiling fixation
 - Alternative electrical interface
 - Alternative colour surface treatment
 - Alternative customised dimensions
 - Alternative LED light colour
- Alternatívne uchytenie do stropu
 - Alternatívny konektor / elektrický interface
 - Alternatívna farba svetla pre LED
 - Alternatívna farba povrchu
 - Alternatívne rozmery

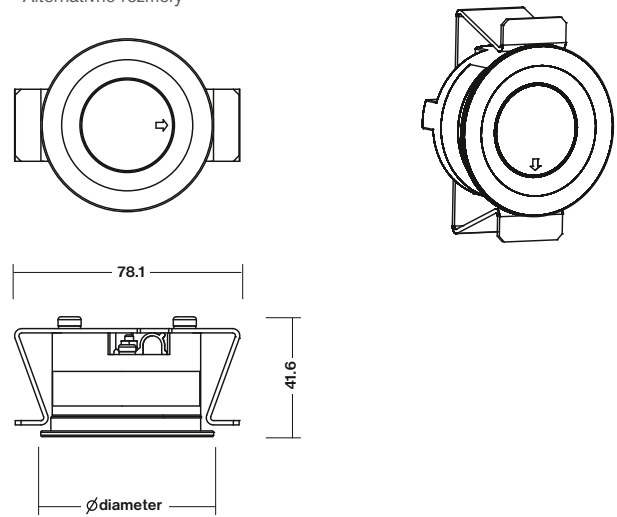


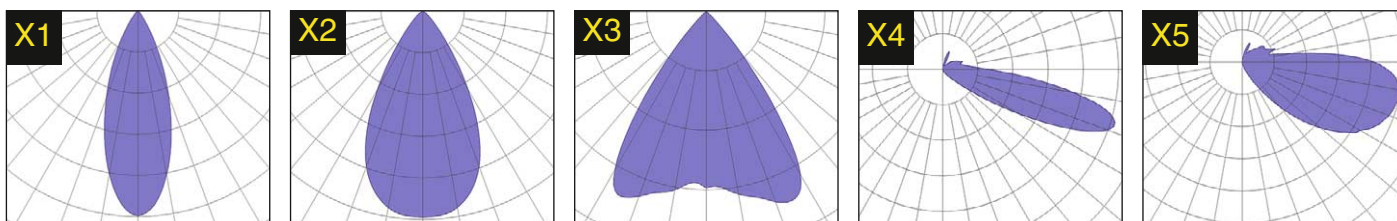
LED SPOT 24-36V DC

Diameter	Panel Thick.	Installation	LED	Power / Light Output	Light Distribution	Electrical Interface	Paint	Order code
80mm	1,5-2,5mm	Wall / Ceiling	3000K	4,8W / 400lm	X1	WAGO 770-243	NCS S 0502-B	316-B-004-01-00
60mm	2,5-3,5mm	Wall	3000K	2,2W / 220lm	X4	NSL 25-5G	ANODISED ELOX	317-B-018-01-00
60mm	2,5-3,5mm	Wall	3000K	2,2W / 220lm	X4	1m long wire tail	ANODISED ELOX	317-B-018-02-00
80mm	1,5-2,5mm	Wall / Ceiling	3000K	4,8W / 400lm	X3	2m long wire tail	NCS S 2500-N	327-B-003-01-00
60mm	1,5-2,5mm	Wall	3000K	2,4W / 220lm	X4	WAGO 769-603	NCS S 1500-N	327-B-007-01-00
60mm	1,5-2,5mm	Wall / Ceiling	3000K	2,4W / 235lm	X1	2m long wire tail	NCS S 2500-N	327-B-009-01-00
60mm	1,5-2,5mm	Wall / Ceiling	3000K	4,8W / 400lm	X3	2m long wire tail	NCS S 2500-N	330-B-053-01-00
60mm	1,5-2,5mm	Wall / Ceiling	3000K	4,8W / 400lm	X3	5m long wire tail	NCS S 2500-N	330-B-053-02-00

LED SPOT 110V DC

Diameter	Panel Thick.	Installation	LED	Power / Light Output	Light Distribution	Electrical Interface	Paint	Order code
60mm	2,5-3,5mm	Wall	4000K	2,0W / 200lm	X4	WAGO 721-603	ANODISED ELOX	315-B-09-01-00
60mm	2,5-3,5mm	Wall	4000K	0,7W / 55lm	X4	WAGO 721-603	ANODISED ELOX	315-B-09-02-00
60mm	2,5-3,5mm	Wall	4000K	2,0W / 200lm	X4	WAGO 721-603	NCS S 2500-N	315-B-09-05-00
60mm	2,5-3,5mm	Wall	4000K	2,0W / 200lm	X4	WAGO 231-603	ANODISED ELOX	327-B-001-01-00
80mm	1,5-2,5mm	Wall / Ceiling	3000K	4,5W / 435lm	X2	WAGO 770-243	RAL9016	327-B-002-01-00
80mm	1,5-2,5mm	Wall / Ceiling	3000K	4,5W / 435lm	X2	WAGO 769-103	NCS S 1500-N	327-B-004-02-00
80mm	4,0-5,0mm	Wall / Ceiling	3000K	4,5W / 435lm	X2	WAGO 769-103	NCS S 1500-N	327-B-004-03-00
80mm	1,5-2,5mm	Wall / Ceiling	4000K	4,5W / 435lm	X2	WAGO 769-103	NCS S 1500-N	327-B-010-02-00
80mm	4,0-5,0mm	Wall / Ceiling	4000K	4,5W / 435lm	X2	WAGO 769-103	NCS S 1500-N	327-B-010-03-00
80mm	1,5-2,5mm	Wall / Ceiling	4000K	4,5W / 435lm	X2	WAGO 770-243	RAL9016	327-B-010-04-00
60mm	1,5-2,5mm	Wall	3000K	0,7W / 55lm	X5	WAGO 770-243	RAL9016	330-B-052-01-00
80mm	1,5-2,5mm	Wall	3000K	4,5W / 400lm	X5	WAGO 770-243	RAL9016	330-B-054-01-00

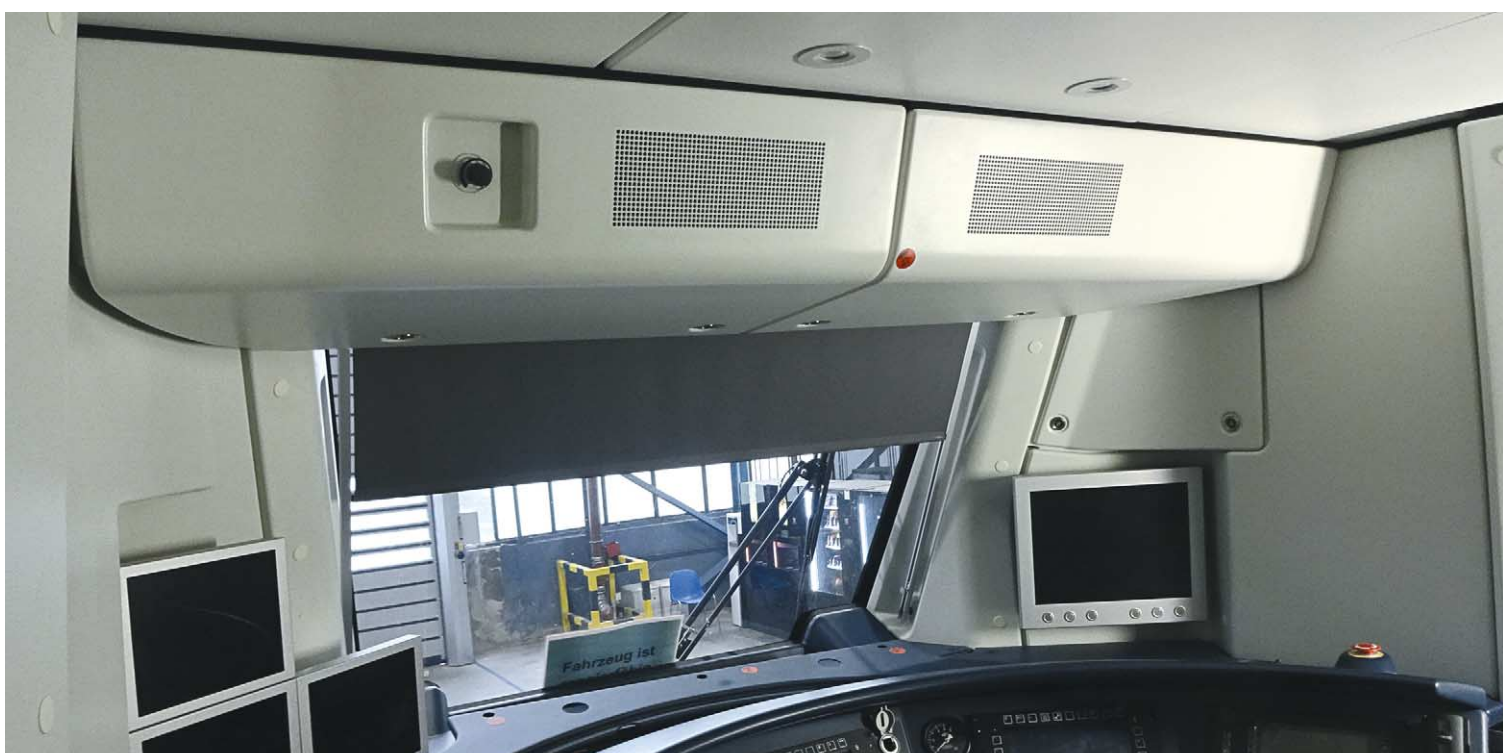







- This LED SPOT fixture is designed especially for illumination of all vehicle driver's cab or corridors or WC areas or etc.
- Wall or ceiling panel recessed mounting, fixation by screws
- Thanks to the special lens is the light distributed to the required area in order to meet EN13272
- The powerful illumination is ensured by HighPower LED
- The LED driver is integrated in LED SPOT dome. No external electronics is needed

- Tieto SPOT LED svietidlá boli špeciálne navrhnuté pre osvetlenie aplikácie ako osvetlenie kabíny vodiča alebo koridorov alebo WC priestorov alebo pod.
- Montáž do stropu alebo steny pomocou skrutiek
- Vďaka špeciálnej šošovke je svetlo distribuované do požadovaného priestoru tak, aby bola splnená norma EN13272
- Svietidlo je vybavené HighPower LED
- Elektronický radradník je integrovaný v telese svietidla

STANDARD ACCESSORIES

ŠTANDARDNÁ VÝBAVA

- Special lens for proper light distribution
- HighPower LED
- LED Binning ≤ 3 MacAdam Steps
- solid AL body painted in RAL or anodised AL
- Halogen-free wiring Betatrans 3GKW
- WAGO terminal blocks


- Špeciálna šošovka pre distribúciu svetla do požadovaného priestoru
- HighPower LED
- LED Binning ≤ 3 MacAdam Steps
- Teleso svietidla vyrobené hliníka s povrchovou úpravou RAL alebo elox
- Halogénovo bezpečné vodiče Betatrans 3GKW
- WAGO prípojné svorkovnice


OPTIONS

PRÍPLATKY

- Alternative ceiling fixation
- Alternative electrical interface
- Alternative colour surface treatment
- Alternative customised dimensions
- Alternative LED light colour

- Alternatívne uchytenie do stropu
- Alternatívny konektor / elektrický interface
- Alternatívna farba svetla pre LED
- Alternatívna farba povrchu
- Alternatívne rozmery

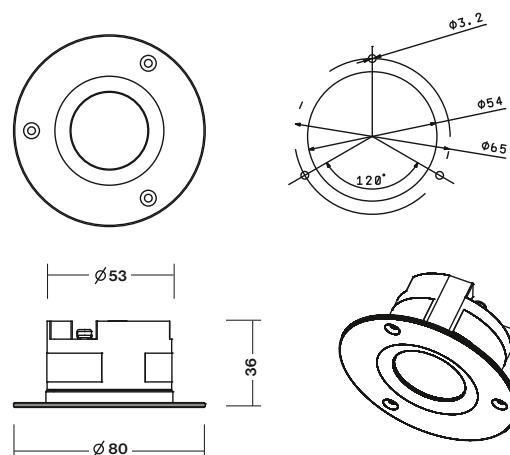

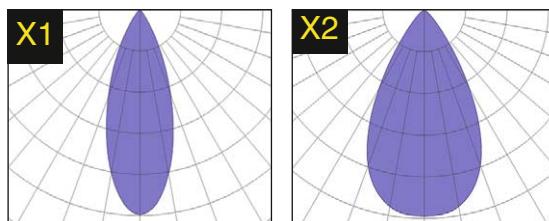
LED SPOT 24-36V DC

Type / Typ	Diameter	Installation	LED	Power / Light Output	Light Distribution	Electrical Interface	Paint	Order code
LED SPOT	80mm	Wall / Ceiling	3000K	4,8W / 400lm	X1	WAGO 770-243	RAL9003	316-B-008-01-00
LED SPOT	80mm	Wall / Ceiling	3000K	4,8W / 400lm	X1	1m long wire tail	ANODISED ELOX	316-B-008-03-00
LED SPOT	80mm	Wall / Ceiling	3000K	2,4W / 240lm	X1	WAGO 770-243	RAL9003	316-B-009-01-00
LED SPOT	80mm	Wall / Ceiling	3000K	4,8W / 400lm	X1	WAGO 769-603	ANODISED ELOX	317-B-017-01-00

LED SPOT 110V DC

Type / Typ	Diameter	Installation	LED	Power / Light Output	Light Distribution	Electrical Interface	Paint	Order code
LED SPOT	80mm	Wall / Ceiling	4000K	4,5W / 450lm	X1	WEIDMUELLER	RAL9006	315-B-10-01-00
LED SPOT	80mm	Wall / Ceiling	3000K	4,5W / 435lm	X2	WAGO 769-103	NCS S 2500-N	327-B-005-01-00
LED SPOT	80mm	Wall / Ceiling	3000K	4,5W / 435lm	X2	WAGO 770-253	NCS S 2500-N	327-B-006-01-00

